



Guidance to achieve U-values and air permeability for Code for Sustainable Homes Level 5/6 - Zero Carbon

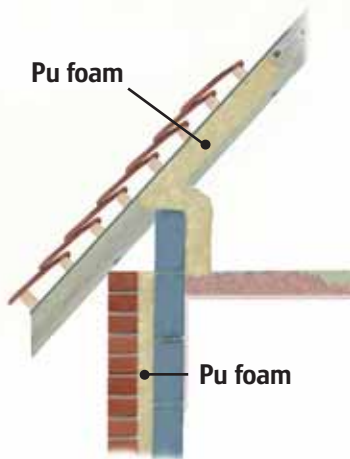


Pitched roof, horizontal ceiling

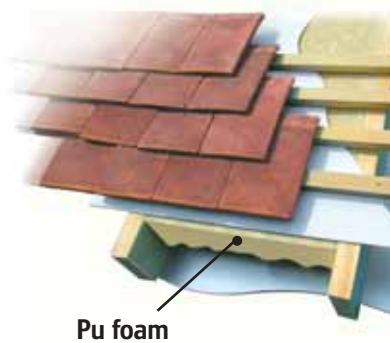

Pitched roof, ceiling at rafter line



Timber frame wall

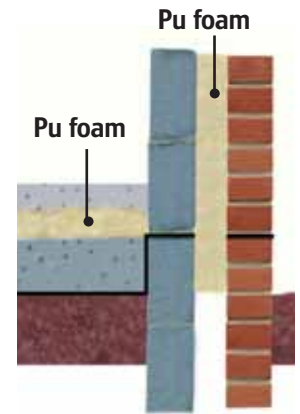

Concrete ground floor and masonry cavity wall

General

The Energy Saving Trust has developed a range of guidance to help housing professionals meet the energy performance requirements of the Code for Sustainable Homes. This is aimed at reducing the UK's carbon dioxide emissions. The documents CE290 - CE292 can be downloaded from their website.

The targets for less CO₂ emissions than the current maximum allowable, calls for stringent U-values, air tightness and a reduction in permissible air permeability from 10m³/(hr.m²)@50Pa to 3m³/(hr.m²)@50Pa.

Renotherm Spray applied polyurethane foam achieves maximum U-values for minimum depth of insulation and completely seals against unwanted air leakage.

On-site sprayed or injected Renotherm polyurethane foam seeks and seals all gaps. Therefore no costly corrections for air gaps are necessary in the calculations. Timber frame and masonry cavity wall constructions insulated with Renotherm polyurethane foam applied to the roof and walls have achieved air permeability results of 3m³/(hr.m²)@50Pa.

Renotherm provide U-value and Condensation Risk Analyses free of charge and give assistance with SAP Ratings. Each project must be assessed individually and therefore all examples here can only be illustrative.

All applications are approved by the British Board of Agrément.



Recommended Depths of Renotherm Polyurethane Foam Insulation

Construction details	U-value	Foam depth	Additional insulation
Pitched roof - horizontal ceiling	0.13W/m ² K	150mm	100mm of mineral fibre at ceiling level
Pitched roof - ceiling at rafter level*	0.13W/m ² K	160mm	30mm foam backed plasterboard
Timber frame wall**	0.15W/m ² K	125mm	30mm foam backed plasterboard
Masonry cavity wall	0.15W/m ² K	125mm	125mm Thermalite Turboblock
Concrete ground floor	0.15W/m ² K	110mm	-

* 172mm rafters @ 600mm centres ** 140mm studs @ 600mm centres